




Model NV-418A

Dual Passive Video/Audio Transceiver

Typical Application

*Video signals traveling in opposite directions may co-exist in the same wire bundle up to 1,000ft (300m), 2,000ft (600m) if Cat5 or better is used.

**For Digital Recording applications, it is recommended that Passive to Passive transmission (Example: NV-314A to NV-314A) distances be limited to no more than 750ft. For distances greater than 750ft. please use an NVT Active Receiver product such as the NV-518A.

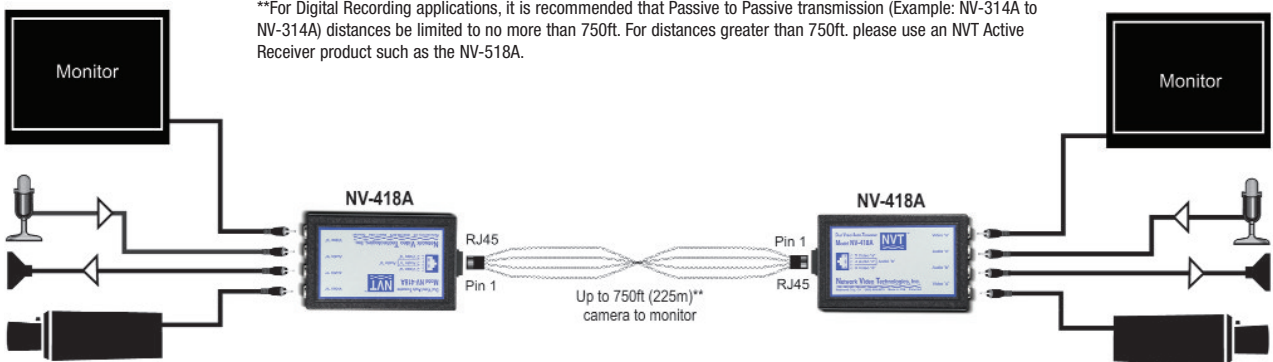

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
nvt.com • info@nvt.com